

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 January 2005 (27.01.2005)

PCT

(10) International Publication Number
WO 2005/007299 A1

(51) International Patent Classification?: **B05B 3/04**,
F16C 17/08

(21) International Application Number:
PCT/IL2004/000584

(22) International Filing Date: 1 July 2004 (01.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
156931 15 July 2003 (15.07.2003) IL

(71) Applicant (for all designated States except US):
NETAFIM (A.C.S.) LTD. [IL/IL]; 161 Arlozorov
Street, 64922 Tel-Aviv (IL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): COHEN, Boaz
[IL/IL]; 3/4 Harav Kook Street, 38427 Hadera (IL).

(74) Agent: REINHOLD COHN AND PARTNERS; P.O.
Box 4060, 61040 Tel Aviv (IL).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: ROTARY SPRINKLER WITH REDUCED WEAR

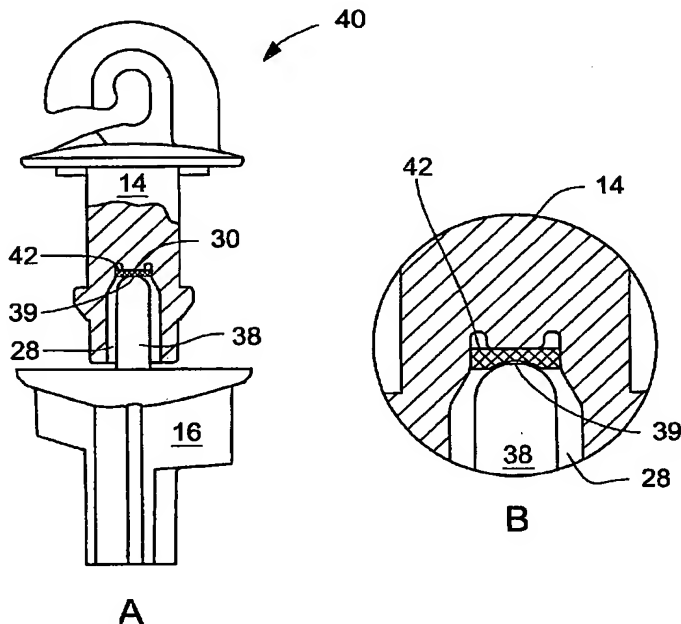

(57) Abstract: A rotary sprinkler comprising a rotor (16) with an axle (38) having a tip, and a thrust bearing (14) with a socket (26) having a bottom (30), the socket being adapted to receive for rotation the axle so that the tip abuts the bottom in a contact zone. The sprinkler further comprises a hard element (42) constituting a part of the bottom or of the tip. The hard element (42) is made of harder material than the axle or the socket, thereby reducing their wear.

WO 2005/007299 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.